

FOAMJOINT™

Expansion Joint Filler



Benefits

All FOAMJOINT™ Products

Continuous Rolls

A unique one piece extruded foam with no laminations or joins

Closed Cell

Non absorbent and impervious to most liquids

Crosslinked

Superior compression and recovery properties, vital to ensure a good joint filler

- Excellent weatherability and resistance to ultra violet light
- Highly resistant to temperature, acids, alkalis, oils and solvents

Variety of Sizes

Available in 25 meter rolls in 10mm thickness

- Standard stock widths are 50mm, 75mm, 100mm, 125mm, 150mm, 200mm, 250mm and 300mm
- Thicker sizes are available from 15mm to 100mm, 15mm to 30mm in rolls with the 40mm to 100mm in sheet form in 2400mm sheets.

FOAMJOINT™ Adhesive

Reduces job time

Supplied with one-sided Acrylic Adhesive for faster installation

Easy to Use

Light, flexible and easily cut and fabricated on site with a sharp knife Plus it is zipped for easy on site clear off

Very Clean

Will not bleed, mark and effect other products during storage.

Advantages

FOAMJOINT™ void filler has the edge through superior performance and ease of application, resulting in welcomed cost savings.

To Resellers

Product Acceptance

Widely accepted throughout Australia

Labeled & Barcoded

Easily identified for stock control and point of sale

Damage Resistant

Easily stored and transported without costly damage issues

Light Weight

Very easy to handle for storage and shipment

To End Users

Availability

FOAMJOINT™ is always readily available

Safe to Handle

Non toxic, non irritant; can be handled without gloves or special precautions

Easy to Install

Light, flexible and easily cut and fabricated on site

Optional Adhesive

Can be supplied with pressure sensitive adhesive for faster and easier installation

Special Sizes

Can be ordered to widths between 50mm to 1000mm, with zip top if required


FOAMJOINT™ Zip Top



FOAMJOINT™ pre-cut zip top expansion joint material provides installation options for when a sealant is to be used.

- Designed for easy on site tear off for sealant applications
- All FOAMJOINT™ is zipped approx. 10mm from the edge
- The zipping ensures a clean tear every time
- When the application does not require a sealant, FOAMJOINT™ should be installed upside down, with the zipped top down to avoid unwanted removal.

Installation Instructions

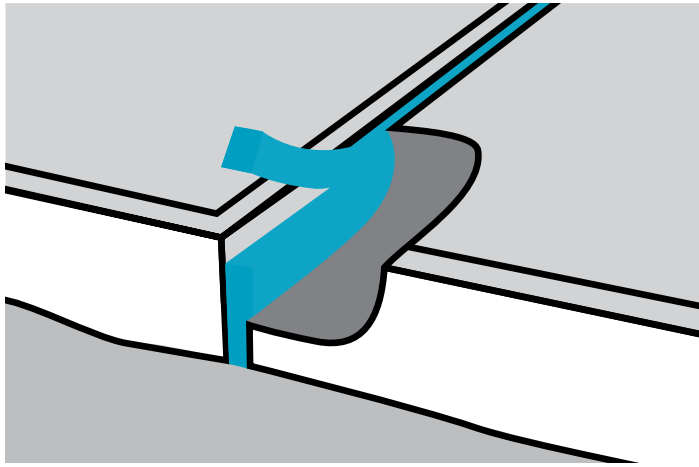

FOAMJOINT™ - Plain

- Unroll and cut to the required length.
- Attach the expansion joint to the adjacent material before pouring the concrete.
- Attachment can be achieved by using either construction adhesive, nails or staples.
- Ensure that the top of the expansion joint is at the top of the intended concrete pour.
- FOAMJOINT™ comes with a “ZIP” tear off strip, the zip should face up if sealing is desired after the concrete hardens. If sealant is not required have the zip facing downwards.
- When the expansion joint is in position, pour the next lot of concrete. Once the concrete has set and sealing is required then remove the zip and commence the sealing process with an appropriate sealant.

FOAMJOINT™ - Adhesive


- Unroll and cut to the required length.
- Attach the expansion joint to the adjacent material before pouring the concrete.
- **Attachment is easily achieved by removing the backing paper and placing the sticky surface to the adjacent material.**
- Ensure that the top of the expansion joint is at the top of the intended concrete pour.
- FOAMJOINT™ comes with a “ZIP” tear off strip, the zip should face up if sealing is desired after the concrete hardens. If sealant is not required have the zip facing downwards.
- When the expansion joint is in position, pour the next lot of concrete. Once the concrete has set and sealing is required then remove the zip and commence the sealing process with an appropriate sealant.

Forms of Expansion Joints

The joints in concrete pavements and driveways etc. fall into two basic categories; those that allow movement (isolation and expansion joints) and those that control cracking of the concrete (control or contraction joints).

Isolation joints are used to separate the pavements from abutting buildings, existing pavements, driveways or rigid structures such as drainage pits, access holes or columns which may cause restraint of the pavement and thereby increase the risk of cracks forming.

Expansion joints are used in large areas of pavement to accommodate expansion, primarily due to temperature variances during periods of hot weather. Expansion joints are used in large areas of pavement to accommodate expansion, primarily due to temperature variances during periods of hot weather. Wherever possible, the location of joints should be planned, and the aim should be to make the concrete panels defined by joints square in shape. For decorative work, joints should, if possible, be located to suit the proposed decorative pattern or finish.

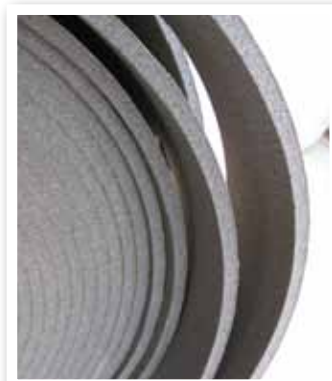

Physical Properties

FOAMJOINT™ is a closed cell, physically crosslinked, polyolefin foam with an outer skin. The foam is free of heavy metals, plasticisers and CFCs.

Property Value	Test Method	Units	Typical
Density	Internal	kg/m ³	25 (nominal)
Tensile Strength	JIS K6767		
MD		kg/cm ²	3.3
CD		kg/cm ²	1.8
Elongation	JIS K6767		
MD		%	240
CD		%	140
Tear Strength	JIS K6767		
MD		kg/cm	2.0
CD		kg/cm	1.3
Compression Strength	Internal		
25%		kg/cm	0.30
50%		kg/cm	0.85
Compression Set	JIS K6767		
25% Defl.n		% set	7.5
50% Defl.n		% set	30.0
Dimensional Change Heat	70°C, 22HR		
MD		%	-1.50
CD		%	-0.90
Water Absorption	JIS K6767	mg/cm ²	0.09
Water Vapour Permeability	JIS Z0208	g/m ² , 24h	4.5



Vespol Building Products Pty Ltd
Head Office - NSW
 26 Garner Place
 Ingleburn NSW 2656
P: 02 9618 3111
E: sales@vespol.com
W: www.vespol.com

Vespol Building Products Pty Ltd
Queensland Branch
 Cnr. Johnstone & South Pine Roads
 Brendale Qld 4500
P: 07 3881 2476
E: salesq@vespol.com